

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$ **1500 A**
 V_{DRM}/V_{RRM} **5600-6500V**
 I_{TSM} **22 kA**
 I^2t **2420 $10^3 A^2S$**



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	$T_c=70^{\circ}C$	125		1500	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms	125	5600		6500	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			600	mA
I_{TSM}	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$	125			22	kA
I^2t	I^2t for fusing coordination					2420	$A^2s \times 10^3$
V_{TO}	Threshold voltage		125			1.20	V
r_T	On-state slope resistance					0.628	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=1500A$, $F=40kN$	25			2.12	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			2000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 3000A, Gate pulse $t_r \leq 0.5\mu s$ IGM=1.5A	125			250	A/μs
Q_{rr}	Recovery charge	$I_{TM}=2000A$, tp=2000μs, $di/dt=-5A/\mu s$, $V_R=50V$	125		3500		μC
I_{GT}	Gate trigger current	$V_A=12V$, $I_A=1A$	25	40		300	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current			25		200	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.3			V
$R_{th(j-C)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 40.0kN				0.010	°C /W
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.003	°C /W
F_m	Mounting force			35	40	47	kN
T_{stg}	Stored temperature			-40		140	°C
W_t	Weight				880		g
Outline		KT60cT					

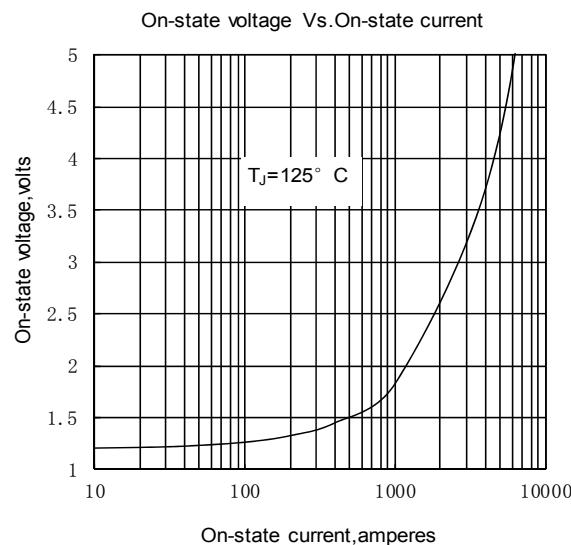


Fig.1

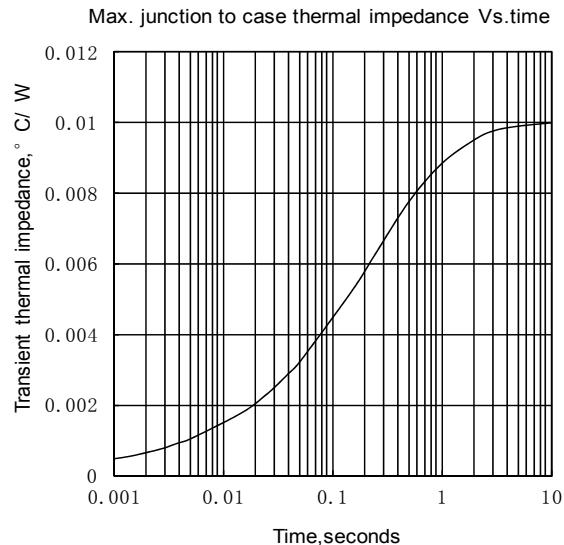


Fig.2

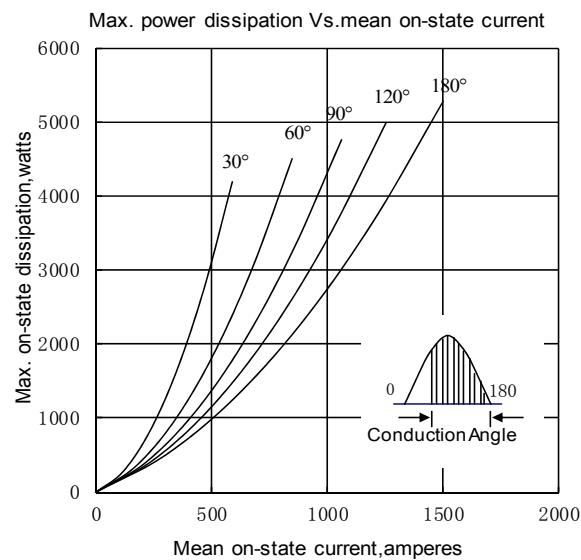


Fig.3

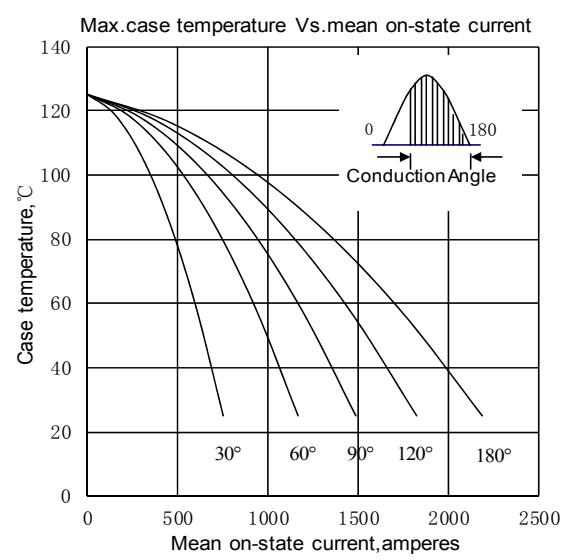


Fig.4

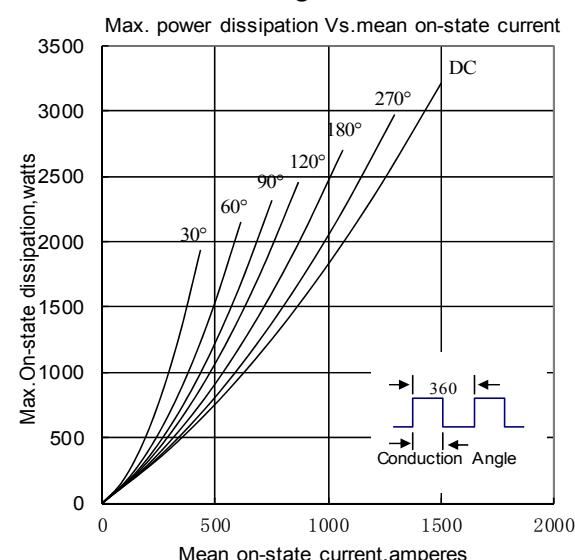


Fig.5

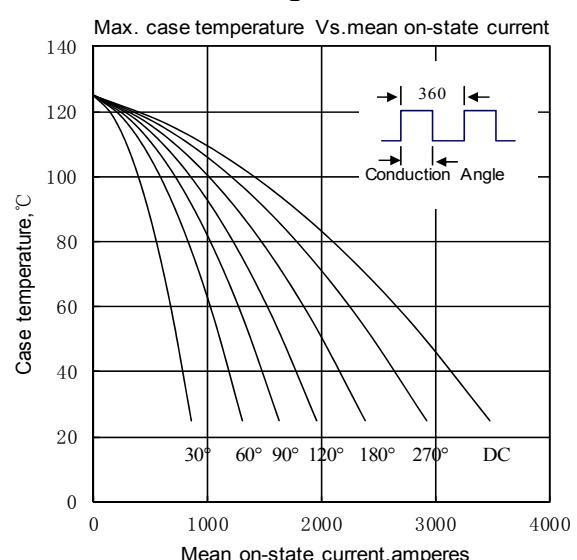


Fig.6

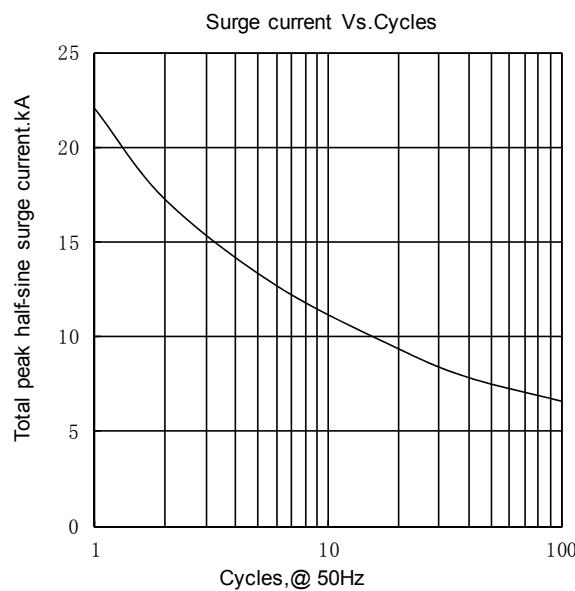


Fig.7

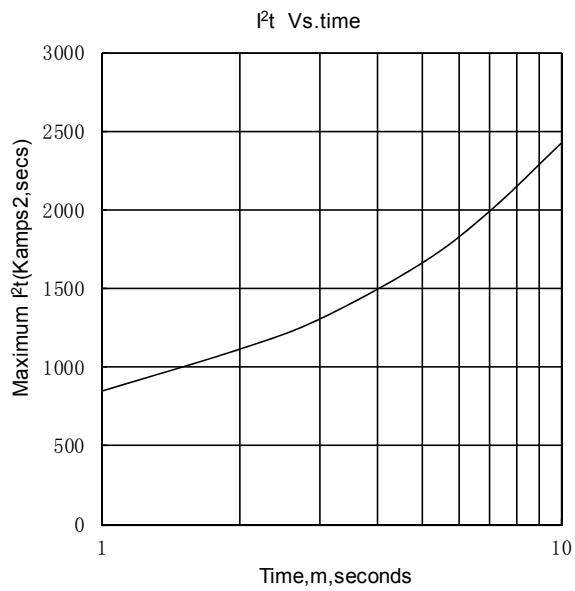


Fig.8

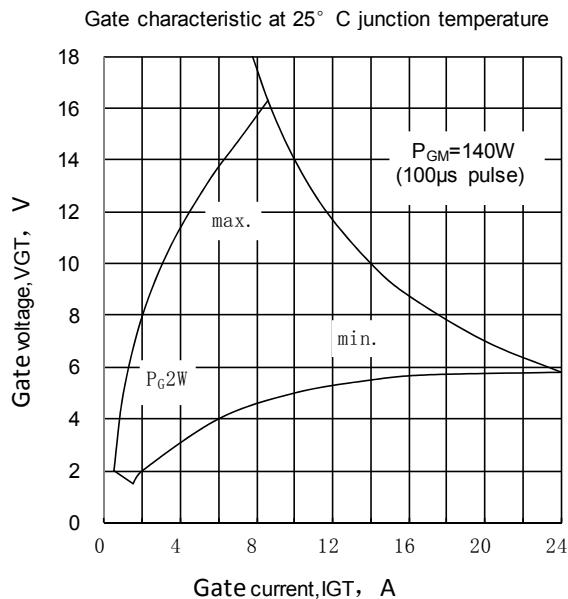


Fig.9

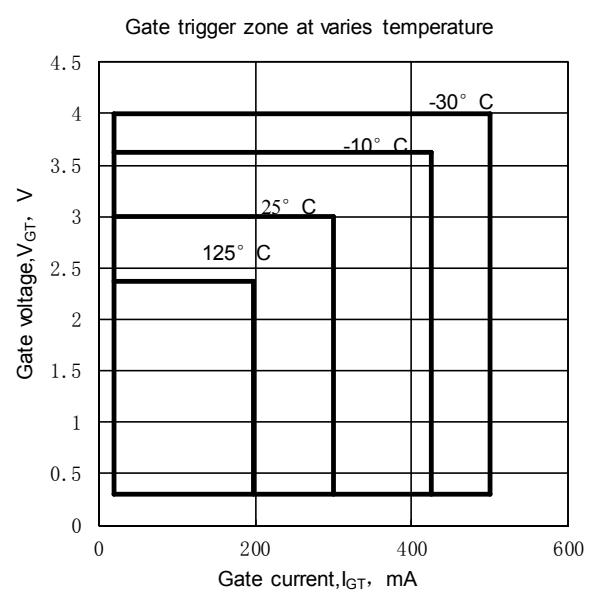


Fig.10

Outline:

