

**Features:**

- Isolated mounting base 3000V~
- Pressure contact technology with Increased power cycling capability
- Space and weight saving

**Typical Applications**

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

| $V_{DSM}, V_{RSM}$ | $V_{DRM}, V_{RRM}$ | Type & Outline |
|--------------------|--------------------|----------------|
| 2100V              | 2000V              | MFx90-20-223F3 |
| 2300V              | 2200V              | MFx90-22-223F3 |
| 2600V              | 2500V              | MFx90-25-223F3 |

| SYMBOL                 | CHARACTERISTIC                             | TEST CONDITIONS   | $T_j(^{\circ}C)$ | VALUE |      |      | UNIT               |
|------------------------|--|---|------------------|-------|------|------|--------------------|
|                        |  |   |                  | Min   | Type | Max  |                    |
| $I_{T(AV)}$            | Mean on-state current                      | 180° half sine wave 50Hz<br>Single side cooled, $T_c=85^{\circ}C$ | 125              |       |      | 90   | A                  |
| $I_{T(RMS)}$           | RMS on-state current                       |   |                  |       |      | 141  | A                  |
| $I_{DRM}$<br>$I_{RRM}$ | Repetitive peak current                    | at $V_{DRM}$<br>at $V_{RRM}$                                      | 125              |       |      | 12   | mA                 |
| $I_{TSM}$              | Surge on-state current                     | 10ms half sine wave<br>$V_R=60\%V_{RRM}$                          | 125              |       |      | 2.25 | kA                 |
| $I^2t$                 | $I^2t$ for fusing coordination             |   |                  |       |      | 25   | $A^2s \times 10^3$ |
| $V_{TO}$               | Threshold voltage                          |   | 125              |       |      | 0.85 | V                  |
| $r_T$                  | On-state slope resistance                  |   |                  |       |      | 3.26 | mΩ                 |
| $V_{TM}$               | Peak on-state voltage                      | $I_{TM}=270A$   | 25               |       |      | 2.60 | V                  |
| $dv/dt$                | Critical rate of rise of off-state voltage | $V_{DM}=67\%V_{DRM}$  | 125              |       |      | 800  | V/μs               |
| $di/dt$                | Critical rate of rise of on-state current  | Gate source 1.5A<br>$t_r \leq 0.5\mu s$ Repetitive                | 125              |       |      | 100  | A/μs               |
| $I_{GT}$               | Gate trigger current                       | $V_A=12V, I_A=1A$   | 25               | 30    |      | 150  | mA                 |
| $V_{GT}$               | Gate trigger voltage                       |   |                  | 0.7   |      | 2.5  | V                  |
| $I_H$                  | Holding current                            |   |                  | 10    |      | 200  | mA                 |
| $V_{GD}$               | Non-trigger gate voltage                   | $V_{DM}=67\%V_{DRM}$  | 125              | 0.2   |      |      | V                  |
| $R_{th(j-c)}$          | Thermal resistance<br>Junction to case     | Single side cooled  |                  |       |      | 0.28 | °C /W              |
| $R_{th(c-h)}$          | Thermal resistance<br>case to heat sink    | Single side cooled  |                  |       |      | 0.15 | °C /W              |
| $V_{iso}$              | Isolation voltage                          | 50Hz, R.M.S, $t=1min, I_{iso}=1mA$ (MAX)                          |                  | 3000  |      |      | V                  |
| $F_m$                  | Terminal connection torque (M5)            |   |                  |       | 4.0  |      | N·m                |
|                        | Mounting torque (M6)                       |   |                  |       | 6.0  |      | N·m                |
| $T_{vj}$               | Junction temperature                       |   |                  | -40   |      | 125  | °C                 |
| $T_{stg}$              | Stored temperature                         |   |                  | -40   |      | 125  | °C                 |
| $W_t$                  | Weight                                     |   |                  |       | 170  |      | g                  |
| Outline                |  | 223F3   |                  |       |      |      |                    |

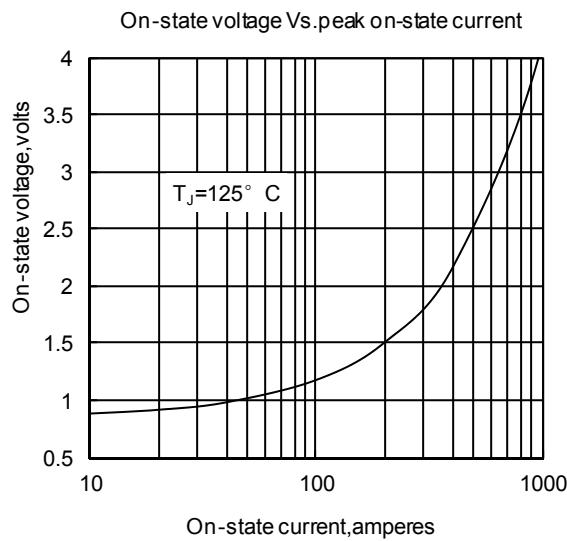


Fig. 1

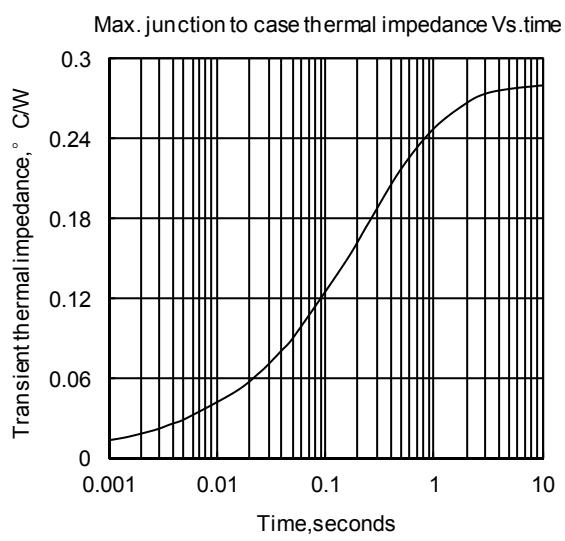


Fig. 2

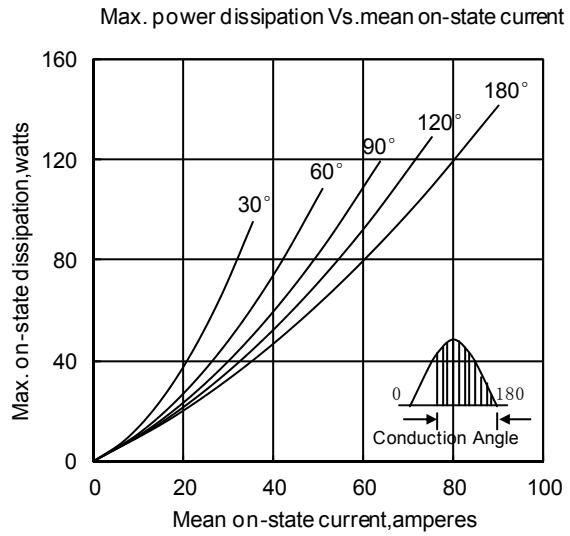


Fig. 3

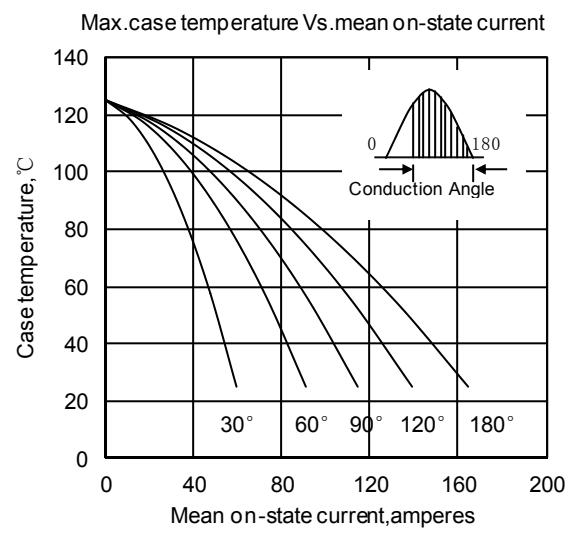


Fig. 4

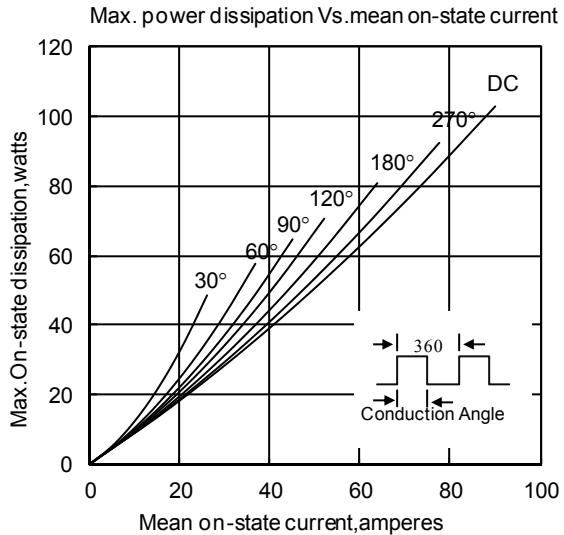


Fig. 5

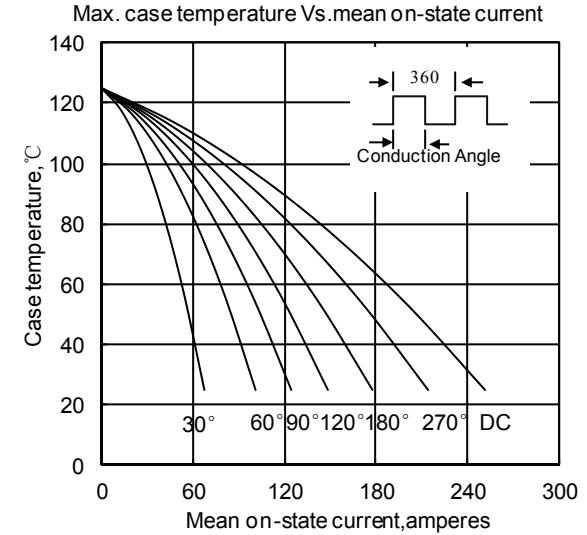


Fig. 6

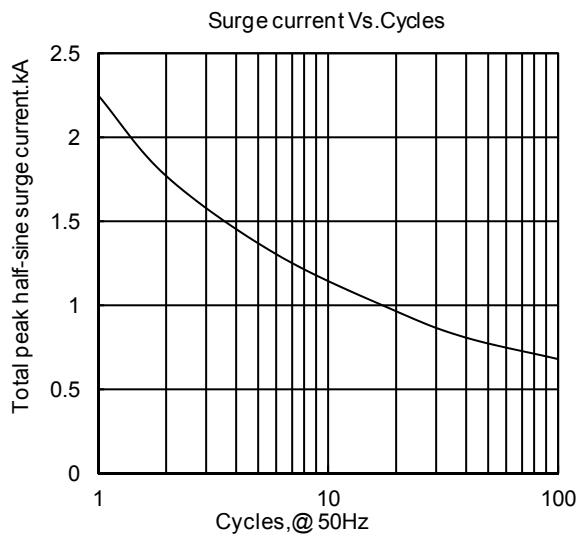


Fig. 7

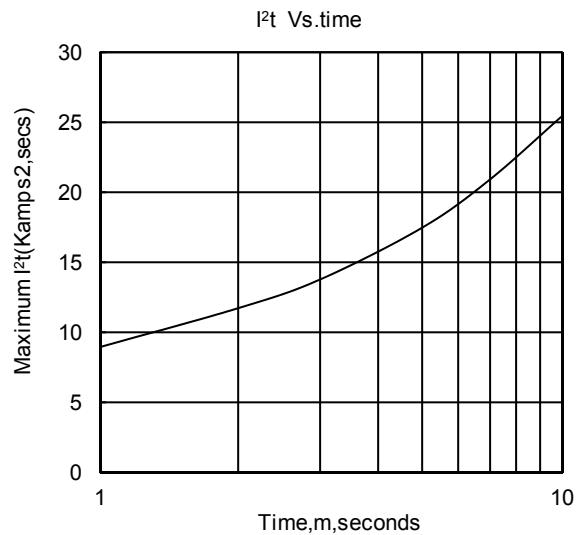


Fig. 8

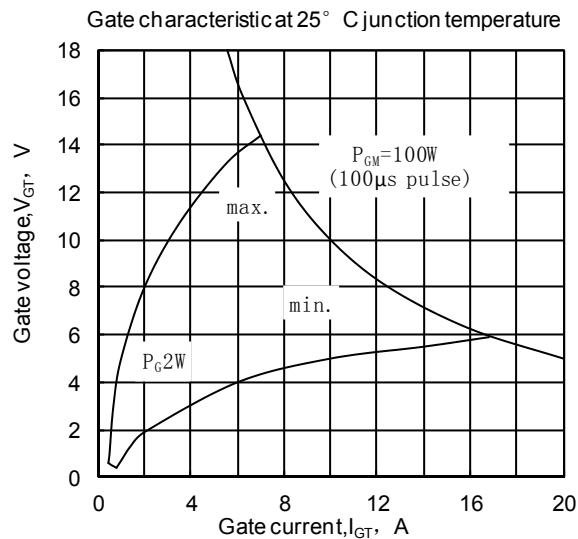


Fig. 9

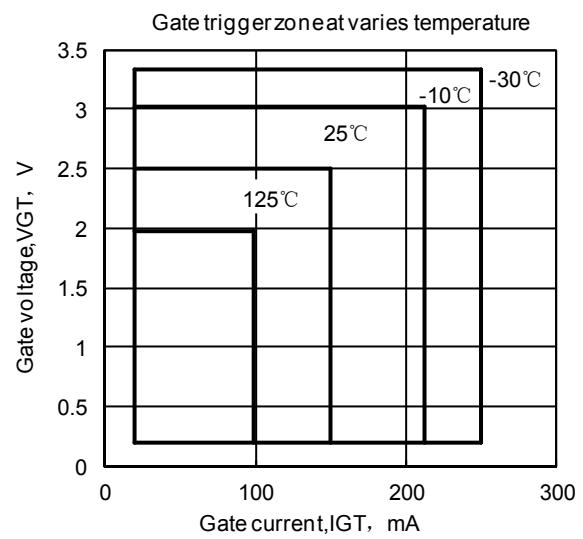


Fig. 10

**Outline:**