**Features:**

- n Isolated mounting base 2500V~
- n Solder joint technology with Increased power cycling capability
- n Space and weight saving

Typical Applications

- n Inverter
- n Inductive heating
- n Chopper

V_{RRM}	Type & Outline
800V	MDS75-08-232H5
1000V	MDS75-10-232H5
1200V	MDS75-12-232H5
1400V	MDS75-14-232H5
1600V	MDS75-16-232H5
1800V	MDS75-18-232H5

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}\text{C})$	VALUE			UNIT
				Min	Type	Max	
I_O	DC output current	Three-phase full wave rectifying circuit, $T_C=100^{\circ}\text{C}$	150			75	A
I_{RRM}	Repetitive peak current	at V_{RRM}	150			8	mA
I_{FSM}	Surge forward current	10ms half sine wave	150			0.5	kA
I^2t	I^2t for fusing coordination	$V_R=0$				1.25	$10^3\text{A}^2\text{s}$
V_{FO}	Threshold voltage		150			0.7	V
r_F	Forward slope resistance					5.0	mW
V_{FM}	Peak forward voltage	$I_{FM}=75\text{A}$	25			1.25	V
$R_{th(j-c)}$	Thermal resistance Junction to case	Single side cooled, per total				0.24	$^{\circ}\text{C}/\text{W}$
$R_{th(c-h)}$	Thermal resistance case to heatsink	Single side cooled, per total				0.07	$^{\circ}\text{C}/\text{W}$
V_{iso}	Isolation voltage	50Hz, R.M.S, $t=1\text{min}$, $I_{iso}:1\text{mA}(\text{max})$		2500			V
F_m	Terminal connection torque(M5)			2.5		4.0	N·m
	Mounting torque(M5)			2.5		4.0	N·m
T_{vj}	Junction temperature			-40		150	$^{\circ}\text{C}$
T_{stg}	Stored temperature			-40		125	$^{\circ}\text{C}$
W_t	Weight				135		g
Outline	232H5						

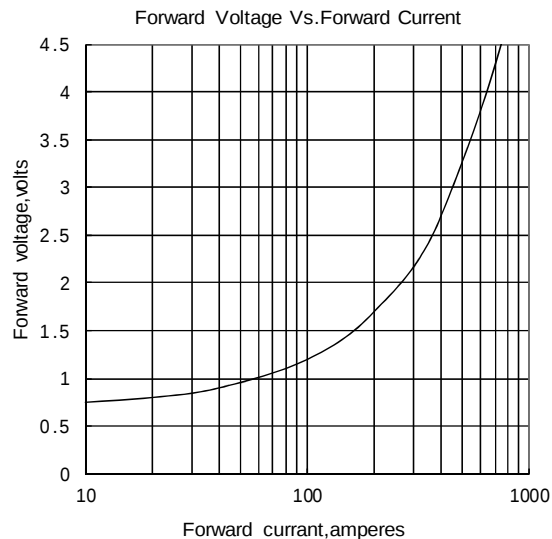


Fig.1

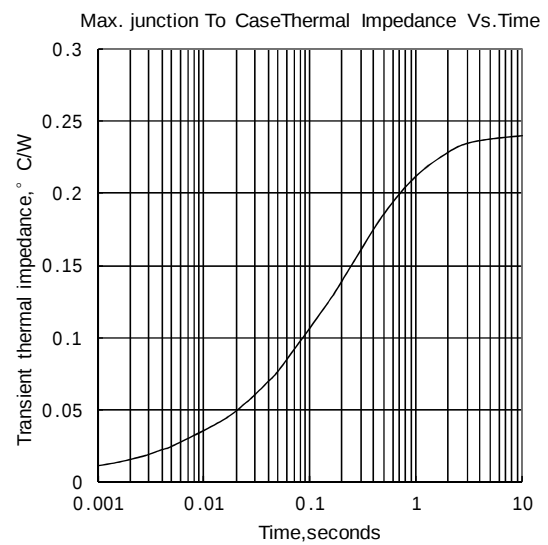


Fig.2

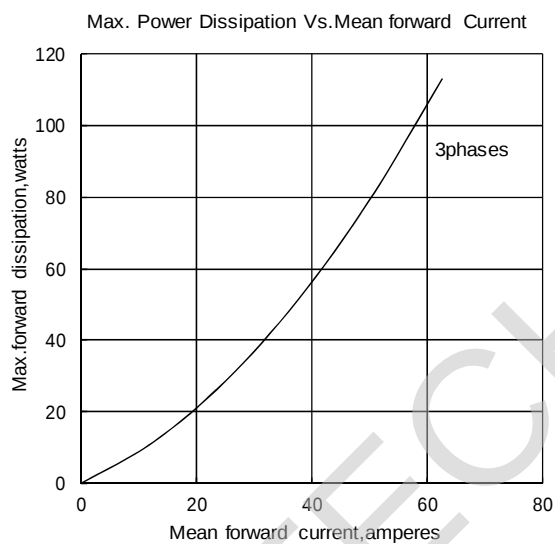


Fig.3

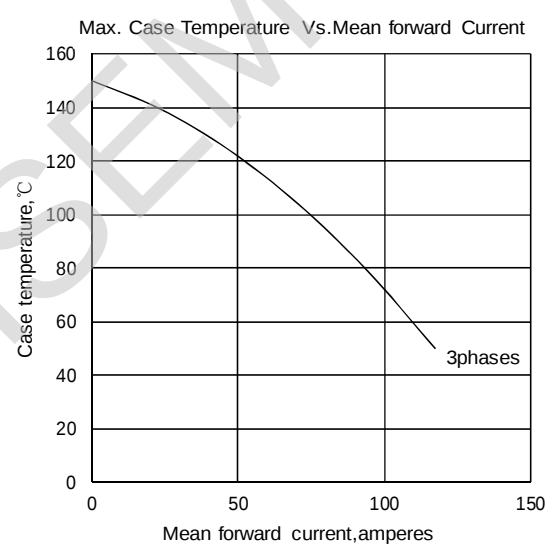


Fig.4

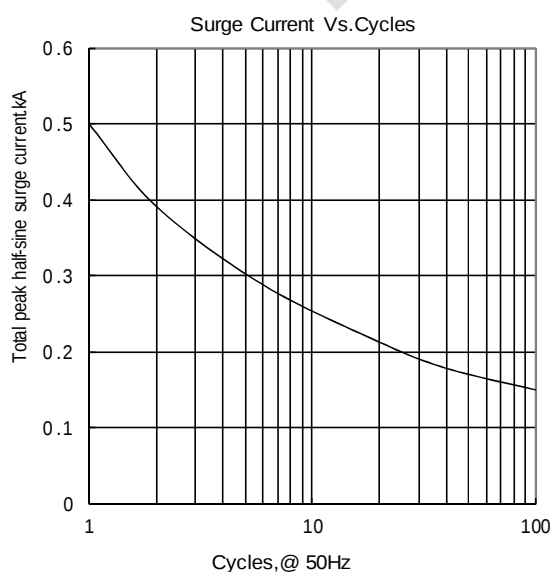


Fig.5

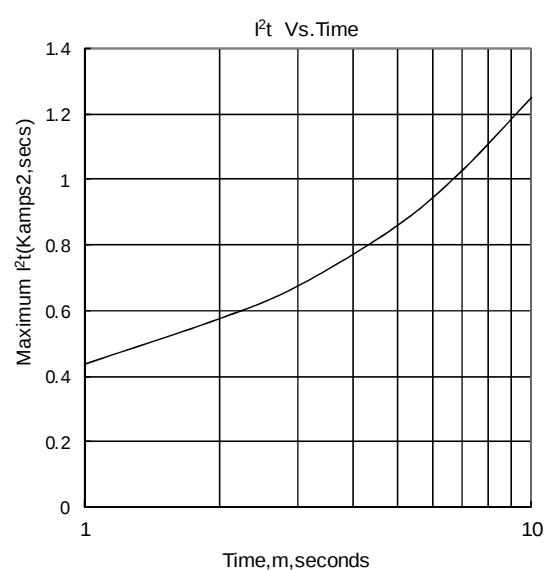
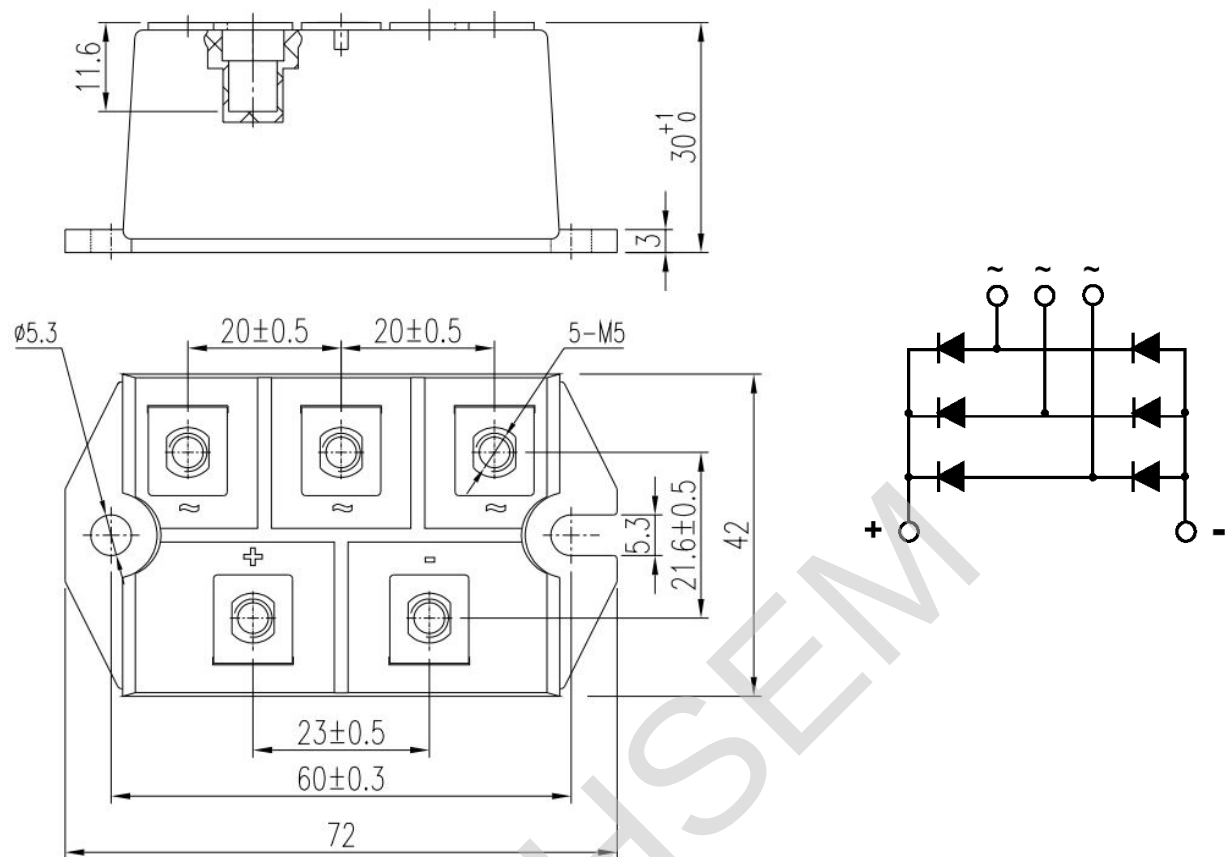


Fig.6

Outline:

Unmarked dimensional tolerance: $\pm 0.5\text{mm}$