**Features:**

- Isolated mounting base 3000V~
 - Pressure contact technology with Increased power cycling capability
 - Space and weight saving
- Typical Applications**
- Various rectifiers
 - DC supply for PWM inverter

V _{RRM}	Type & Outline		
	Min	Type	Max
800V		MD1000-08-432F2	
1000V		MD1000-10-432F2	
1200V		MD1000-12-432F2	
1400V		MD1000-14-432F2	
1600V		MD1000-16-432F2	
1800V		MD1000-18-432F2	

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT
				Min	Type	Max	
I _{F(AV)}	Mean forward current	180° half sine wave 50Hz Single side cooled, T _c =100°C	150			1000	A
I _{F(RMS)}	RMS forward current					1570	A
I _{RRM}	Repetitive peak current	at V _{RRM}	150			50	mA
I _{FSM}	Surge forward current	V _R =60%V _{RRM} , t=10ms half sine	150			28	kA
I ² t	I ² t for fusing coordination					3920	10 ³ A ² s
V _{FO}	Threshold voltage		150			0.82	V
r _F	Forward slope resistance					0.10	mΩ
V _{FM}	Peak forward voltage	I _{FM} =3000A	25			1.30	V
R _{th(j-c)}	Thermal resistance Junction to case	Single side cooled per chip				0.042	°C/W
R _{th(c-h)}	Thermal resistance case to heatsink	Single side cooled per chip				0.020	°C/W
V _{iso}	Isolation voltage	50Hz,R.M.S,t=1min,I _{iso} :1mA(MAX)		3000			V
F _m	Terminal connection torque(M12)			12		14	N·m
	Mounting torque(M6)			4.5		6.0	N·m
T _{vj}	Junction temperature			-40		150	°C
T _{stg}	Stored temperature			-40		125	°C
W _t	Weight				2700		g
Outline				432F2			

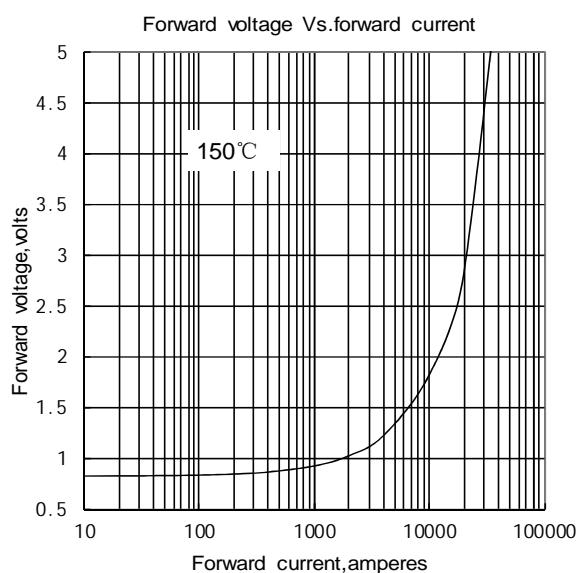


Fig.1

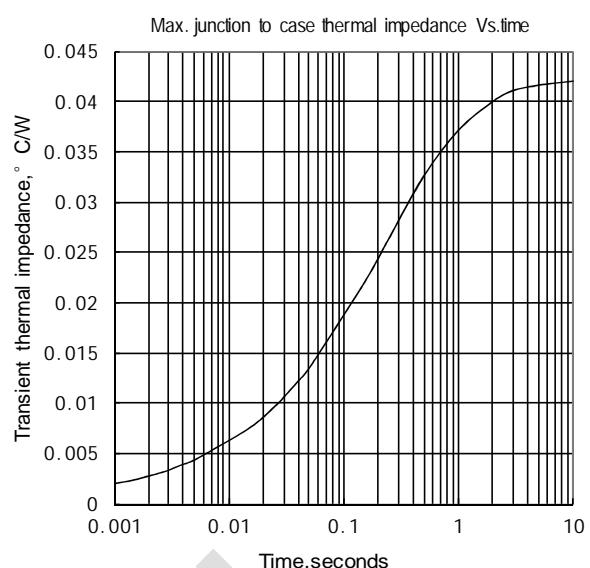


Fig.2

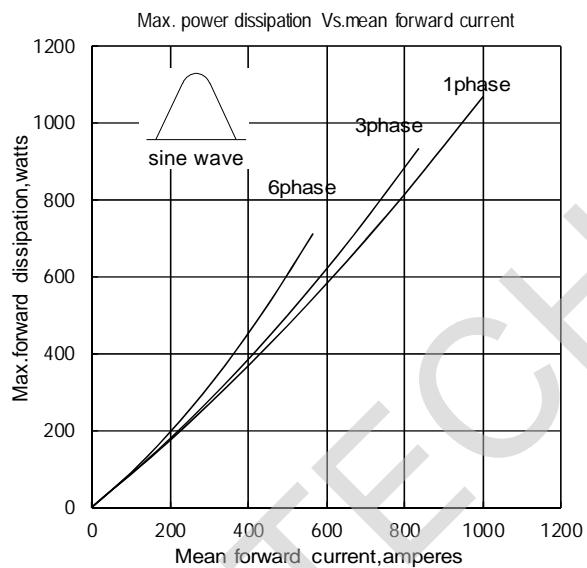


Fig.3

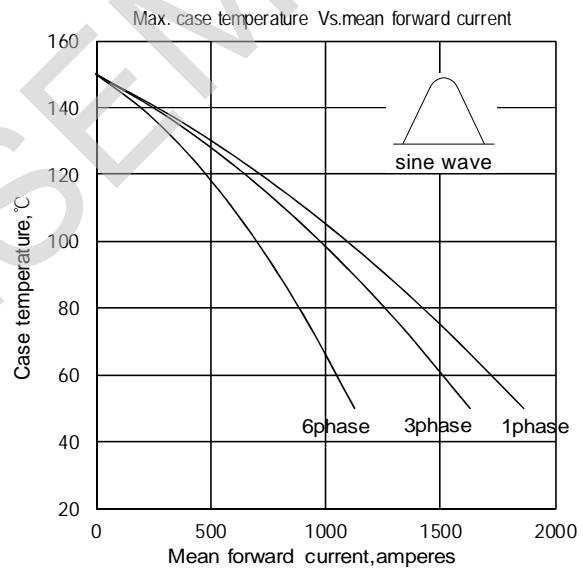


Fig.4

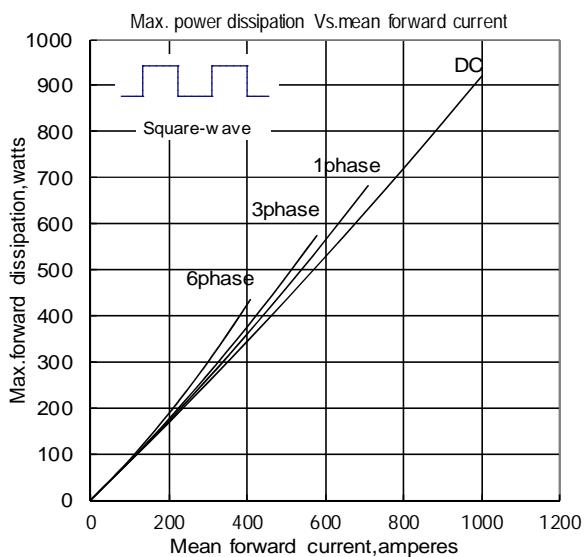


Fig.5

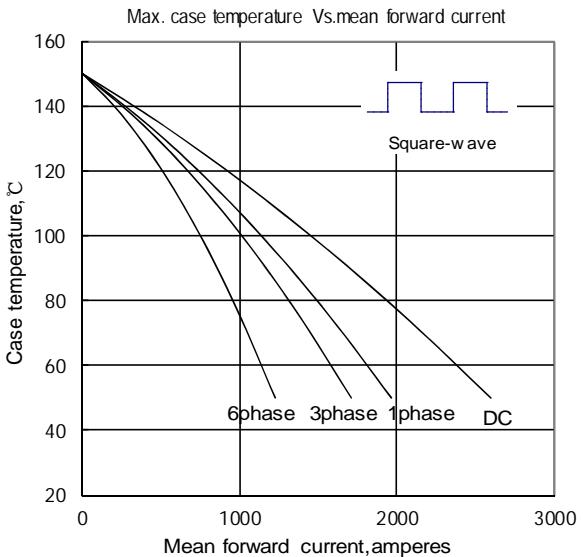


Fig.6

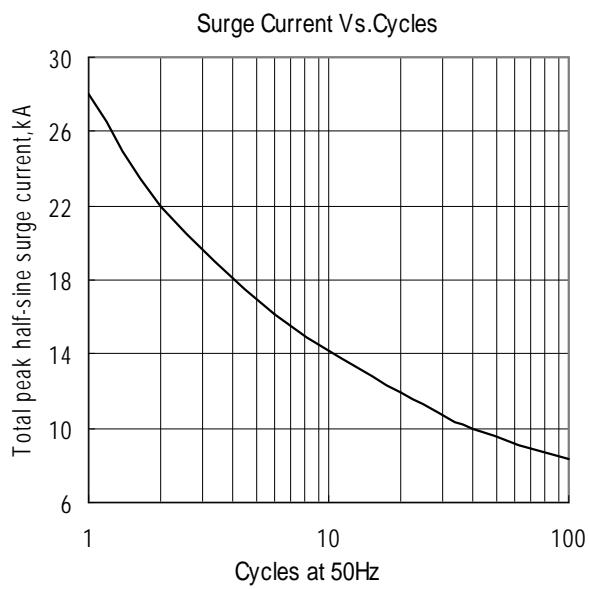


Fig.7

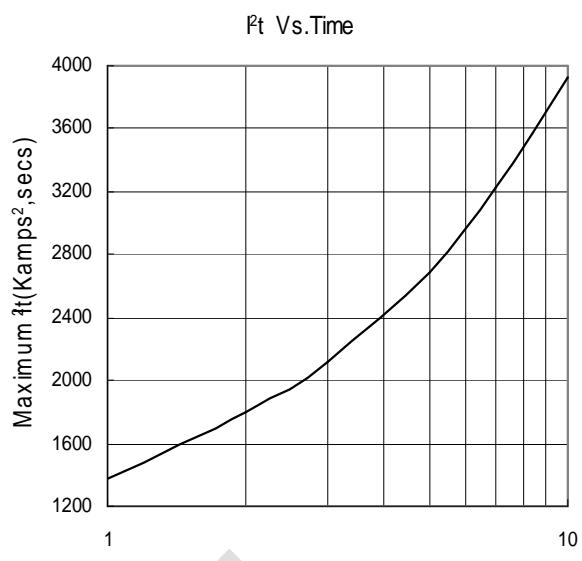
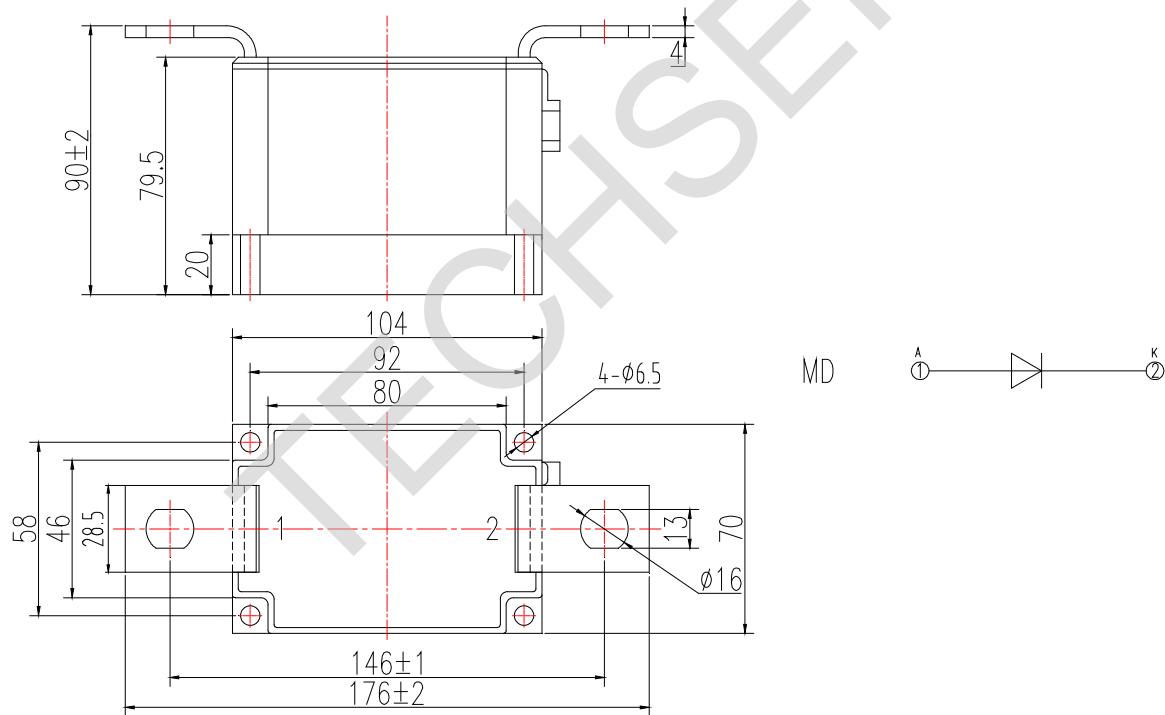


Fig.8

Outline:Unmarked dimensional tolerance: $\pm 0.5\text{mm}$